




CONTEGO IIIA CONCEALABLE VEST

**** NIJ .06 CERTIFIED ****

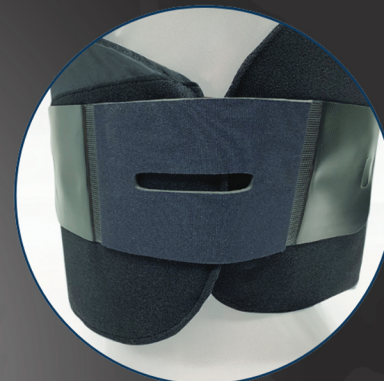

SERIES	CONTEGO CONCEALABLE VEST IIIA
NIJ 0101.06 MODEL #	SLSIIIA
NIJ 0101.06 THREAT LEVEL	IIIA
NIJ CERTIFICATION SIZES	C1 – C5
BALLISTIC MATERIAL	Woven Twaron / UD Twaron
WEIGHT	1.18 psf
THINNESS	.25 in (6.35mm)
V50 – 357sig 125gr FMJ (new)	1867 ft/s (569m/s)
V50 – 357sig 125gr FMJ (conditioned)	1796 ft/s (547m/s)
P-BFS Avg. – 357sig 125gr FMJ	27.3 mm
V50 – 44mag 240gr SJHP (new)	1661 ft/s (506m/s)
V50 – 44mag 240gr SJHP (conditioned)	1613 ft/s (492m/s)
P-BFS Avg. – 44mag 240gr SJHP	36 mm
SPECIAL THREAT TESTING	
V50 - 2gr RCC	3070 ft/s (936m/s)
V50 - 4gr RCC	2684 ft/s (818m/s)
V50 - 16gr RCC	2277 ft/s (694m/s)
V50 - 17gr FSP (.22cal)	2098 ft/s (639m/s)
V50 - 64gr RCC	1841 ft/s (564m/s)
V50 – 9mm 127gr SXT (new)	1722 ft/s (525m/s)
P-BFS Avg. – 9mm 127gr SXT	25.8 mm
V50 - 7.62x25mm Tokarev SJLC	1687 ft/s (514m/s)
P-BFS Avg. – 7.62x25mm Tokarev SJLC	24 mm
V50 – 40cal 165gr S+W Sp GDHP (new)	1740 ft/s (530m/s)
P-BFS Avg. – 40cal 165gr S+W Sp GDHP	25.5 mm
V50 – 5.7x28 27gr SS195 LFHP (new)	2206 ft/s (672m/s)
P-BFS Avg. – 5.7x28 27gr SS195 LFHP	13.9 mm
V50 – 5.7x28 40gr SS197 SR (new)	2091 ft/s (637m/s)
P-BFS Avg. – 5.7x28 40gr SS197 SR	19.8 mm

RMA IS THE **#KINGOFARMOR**